


ND10 METER OF NETWORK PARAMETERS


FEATURES:




INPUT:

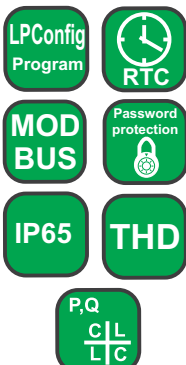

OUTPUTS:



GALVANIC ISOLATION:



Export department:
+48 68 45 75 139 / 305 / 321 / 368
Fax: +48 68 32 54 091
e-mail: export@lumel.com.pl

LUMEL S.A.
ul. Stubińska 1
65-127 Zielona Góra
POLAND
WWW.LUMEL.COM.PL




NEW



- Meter supply from measurement circuit
- Measurement of basic power quantities:
 U_{L-L} , U_{L-N} , I_n , f , P , Q , S , PF , $tg\phi$, $\cos\phi$, ϕ , E_{p+} , E_{p-} , E_{qL} , E_{qC} , THD
- 2 alarm outputs
- Pulse output for active energy
- Interface RS485 Modbus Slave (option)
- LCD display 3.5"
- Protection grade from the frontal side IP65

EXAMPLE OF APPLICATION

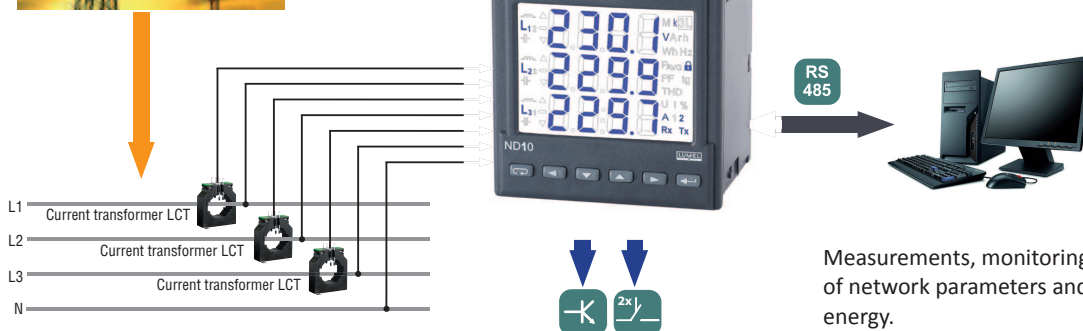

MEASURED QUANTITIES AND MEASURING RANGES

Measured value	Indication range	Measuring range	L1	L2	L3	Σ	Basic error
Current I_n 1 A 5 A	0.00...1.5 kA 0.00 ... 60 kA	0,005...1,200 A~ 0,025...6,000 A~	•	•	•		$\pm 0.2\%$ r
Voltage L-N 57,7 V 230 V 290 V	0.0 ... 230.8 kV 0.0 ... 1.012 MV 0.0 ... 1.200 MV	50...64 V~ 195...253 V~ 246...300 V~	•	•	•		$\pm 0.2\%$ mv
Voltage L-L 100 V 400 V 500 V	0.0 ... 440 kV 0.0 ... 1.752 MV 0.0 ... 2.000 MV	85...110 V~ 340 ... 440 V~ 425 ... 520 V~	•	•	•		$\pm 0.5\%$ mv
Frequency	47.0 ... 63.0 Hz	47,0...63,0 Hz	•	•	•		$\pm 0.2\%$ mv
Active power	-9999 MW ... 0.00 W ... 9999 MW	-1,52 kW...1,0 W...1,52 kW	•	•	•	•	$\pm 0.5\%$ r
Reactive power	-9999 Mvar ... 0.00 var ... 9999 Mvar	-1.52 kvar...1.0 var...1.52 kvar	•	•	•	•	$\pm 0.5\%$ r
Apparent power	0.00 VA ... 9999 MVA	1.0 VA...1.52 kVA	•	•	•	•	$\pm 0.5\%$ r
Power factor PF	-1 ... 0... 1	-1...0...1	•	•	•	•	$\pm 1\%$ r
Tangent ϕ	-1.2 ... 0 ... 1.2	-1.2...0...1.2	•	•	•	•	$\pm 1\%$ r
Cosine ϕ	-1...1	-1...1	•	•	•	•	$\pm 1\%$ r
ϕ	-180...180	-180...180	•	•	•		$\pm 0.5\%$ r
Imported active energy	0 ... 99 999 999.9 kWh					•	$\pm 0.5\%$ r
Exported active energy	0 ... 99 999 999.9 kWh					•	$\pm 0.5\%$ r
Inductive reactive energy	0 ... 99 999 999.9 kvarh					•	$\pm 0.5\%$ r
Reactive capacitive energy	0 ... 99 999 999.9 kvarh					•	$\pm 0.5\%$ r
THD	0 ... 100%	0 ... 100%	•	•	•		$\pm 5\%$ r

r - of the range
mv - of the measured value

OUTPUTS

Output type	Properties
Relay output	• 2 relays, normally open voltageless contacts, load capacity 250 V~/0,5 A~
Pulse output of active energy	• 1 OC type (NPN), passive class A acc. to EN 62053-31, supply voltage 18...27 V, current 10...27 mA

DIGITAL INTERFACE

Interface type	Transmission protocol	Mode	Baud rate
RS-485	MODBUS RTU	8N2, 8E1, 8O1, 8N1	4.8; 9.6; 19.2; 38.4 kbit/s

EXTERNAL FEATURES

Readout field	LCD 3.5" screen, specialized, monochrome with backlight		
Weight	< 0.3 kg		
Overall dimensions	96 × 96 × 77 mm	panel cut-out: 92 ^{+0,6} × 92 ^{+0,6} mm	
Protection grade (acc. to EN 60529)	from frontal side: IP65	from terminal side: IP20	


RATED OPERATING CONDITIONS

Supply voltage /from measurement circuit of phase L3/	50...64 V a.c., 195...253 V a.c., 246...300 V a.c.; 47...63 Hz	Power consumption: - in voltage circuit L1,L2 ≤ 0.05 VA - in voltage circuit L3 ≤ 3 VA - in current circuits ≤ 0.05 VA
Temperature	ambient: -20...23...55°C	storage: -30...70°C
Relative humidity	25...95%	inadmissible condensation
Operating position	any	
External magnetic field	40...400 A/m	
short duration overload (5 s)	voltage input: 2 Un	current input: 10 In

SAFETY AND COMPATIBILITY REQUIREMENTS

Electromagnetic compatibility	noise immunity	acc. to EN 61000-6-2
	noise emissions	acc. to EN 61000-6-4
Safety requirements		acc. to EN 61010-1

EXAMPLE OF CONNECTION DIAGRAM

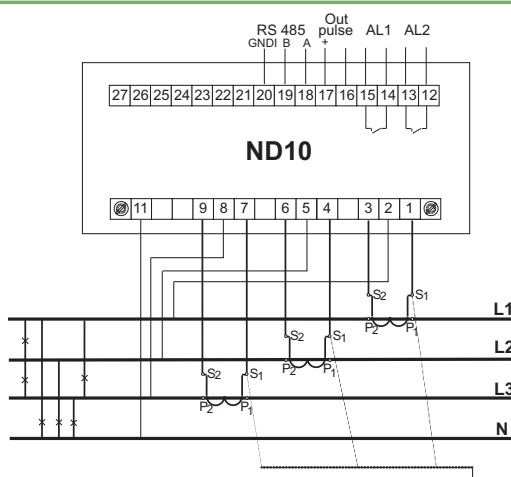

ORDERING

	ND10 -	X	X	XX	X	X
Current input In:						
1 A (X/1)		1				
5 A (X/5)		2				
Voltage input (phase/ phase-to-phase) Un:						
3 x 57.7/100 V		1				
3 x 230/400 V		2				
3 x 290/500 V		3				
Digital output:						
without RS485 interface		0				
with RS485 interface		1				
Version:						
standard				00		
custom-made*				XX		
Language:						
Polish					P	
English					E	
other*					X	
Acceptance tests:						
without extra quality requirements					0	
with an extra quality inspection certificate					1	
acc. to customer's request*					X	

* - after agreeing with the manufacturer

EXAMPLE OF ORDER:

the code: **ND10 - 2 2 1 00 E 1** means:

- ND10** - meter of network parameters of ND10 type,
- 2** - current input 5 A,
- 2** - input voltage 3 x 230/400 V,
- 1** - with RS485 interface
- 00** - standard version,
- E** - all descriptions and user's manual in English,
- 1** - with extra quality inspection certificate.

SEE ALSO:



Free LPConfig program for programming LUMEL's products. Available on our internet website.



LCT current transformers from 5 A to 6 kA.



P43 - three-phase transducer of power network parameters.

OUR OFFER



www.lumel.com.pl

For more information about LUMEL's products please visit our website: www.lumel.com.pl

Export department:
+48 68 45 75 139 / 305 / 321 / 368
Fax: +48 68 32 54 091
e-mail: export@lumel.com.pl

„LUMEL” S.A.
ul. Słubicka 1
65-127 Zielona Góra
POLAND
WWW.LUMEL.COM.PL